

Product Finish: Antique Bronze


Product code: ZP1037
EAN13 barcode: 5060344151214



Product features:


All Zoom taps are provided with:

- Colour coded 600mm long (cut to length) flexible John Guest hoses.
- 10 x 15mm John guest pushfit connectors.
- Non return valves (if required).
- Box spanner for easy affixing.
- Step by step instructions.

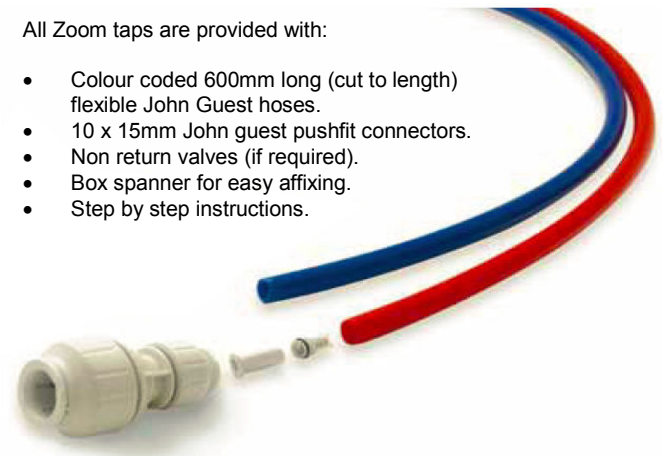

Additional information / Parts included:

REF!

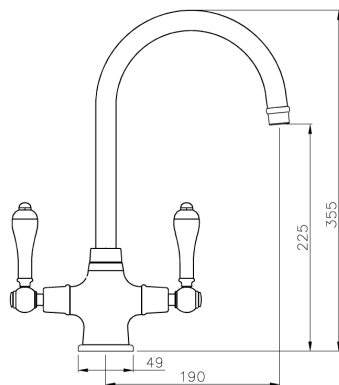

- **Overall Height / projection:** 355 mm
- **Exit reach:** 190 mm
- **Exit height:** 225 mm
- **Centre distance(s):**

- **Base diameter(s):** 49 mm
- **Recommended hole diameter:** Ø 35 mm
- **Max. surface depth:** mm

- **Spout diameter:** mm
- **Spout aerator size:** 22


Box length: 1.49mm

Box depth: 240mm

Box width: 420mm

Boxed weight: abode printed black box, tape sealedkg

Flow path	Dynamic working pressures (bar)											
	0.1	0.2	0.3	0.4	0.6	0.75	1	1.5	2	2.5	3	4
Hot	0.26	0.56	0.87	1.17	1.66	2.15	2.64	3.13	3.62	4.11	4.60	5.09
Cold	1.01	2.14	3.29	4.41	6.11	7.57	9.05	10.52	12.00	13.47	14.95	16.42
Mixed	1.42	3.03	4.33	5.15	6.87	7.36	8.81	10.08	12.41	13.81	15.23	17.13
Filtered												
Sprayhead												

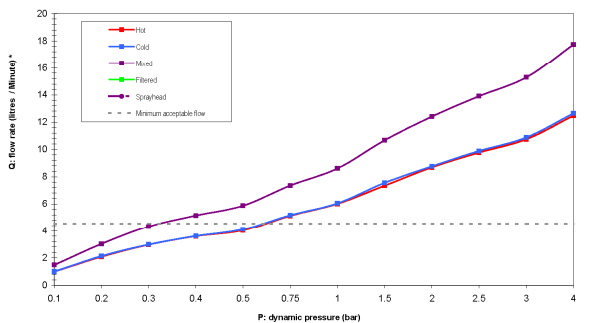

Note 1: _____
 Note 2: _____
*Flow rate data shown is correct at the time of printing, we reserve the right to amend specifications without prior notice.

- **Min / Max water pressure:** 0.40 / 0.2 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 15.29

- **Control valve type:** Ceramic disc QT
- **Product flow characteristics:** 18.13
- **Non return valve(s):** 245

- **Aerator type:** Dual flow
- **Accepts revolve / spray areator:** 22f
- **Spout connection method:** Yes

- **Tail pipe inlet / outlet size:** 15mm Ø / copper rigid tube
- **Inlet pipe type / length:** / M12 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year