

# Ratio Professional Single Lever


**Product Finish:** Chrome

**Product code:** ZP1058  
**EAN13 barcode:** 5060344151405

**Product features:**


All Zoom taps are provided with:

- Colour coded 600mm long (cut to length) flexible John Guest hoses.
- 10 x 15mm John guest pushfit connectors.
- Non return valves (if required).
- Box spanner for easy affixing.
- Step by step instructions.

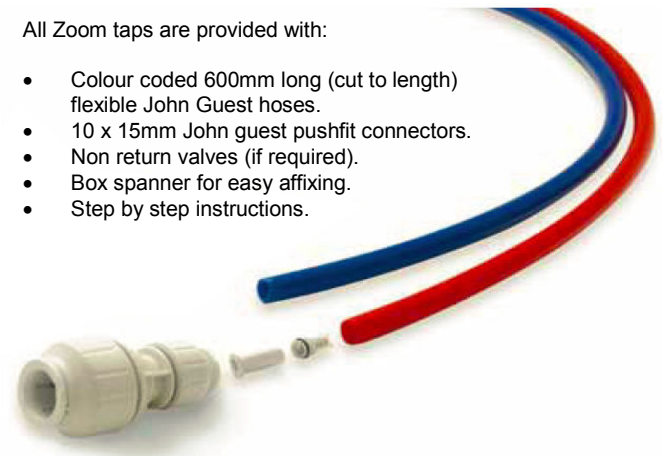

**Additional information / Parts included:**

Dual fixing studs, includes load stabiliser & flow straightener & 2.5mm a/f Allen key

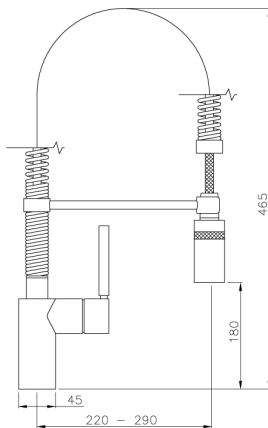

- **Overall Height / projection:** 465 mm
- **Exit reach:** 220-290 mm
- **Exit height:** 180 mm
- **Centre distance(s):**

- **Base diameter(s):** 45 mm
- **Recommended hole diameter:** Ø 35 mm
- **Max. surface depth:** 40 mm


- **Spout diameter:** n/a mm
- **Spout aerator size:** 24f

**Box length:** 430mm

**Box depth:** 70mm

**Box width:** 340mm

**Boxed weight:** 3.45kg

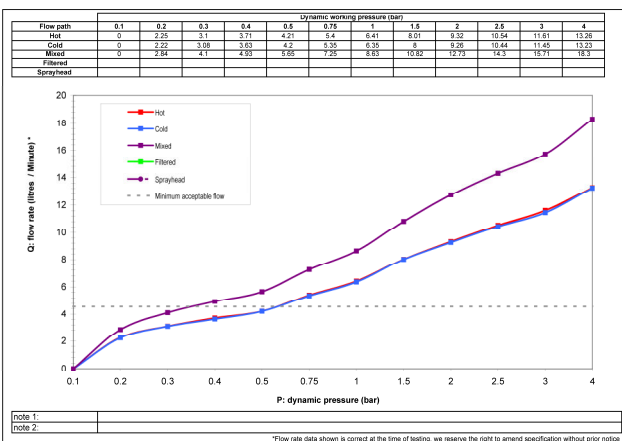

- **Min / Max water pressure:** 0.40 / 5.5 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 15.71

- **Control valve type:** Single lever ceramic cartridge
- **Product flow characteristics:** Single flow
- **Non return valve(s):** Hot & cold (integral to tails)

- **Aerator type:** Metal fine mesh diffuser
- **Accepts revolve / spray areator:** No
- **Spout connection method:** Grub screw

- **Tail pipe inlet / outlet size:** M10 / 1/2" BSP Male
- **Inlet pipe type / length:** flexible stainless braided hose / 270 mm

**Care instructions summary:**

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

**Warranty Summary** (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year